

## SUMMARY



### # Wires

Low	7
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0

### Download

[Request a quote](#)

[Catalog](#)

Series	P
Termination type	Male solder
IP rating	50
Cable Ø	4.00 - 5.20 mm
Matching parts	PLG.M0.7GL.LG

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	PA*: Straight plug with cable collet
Keying	1 key (alpha=0; Plug: male contact; Receptacle: female contact)
Housing Material	PSU (Polysulfone), gray
Cable Fixing	C52: 4 - 5.2 mm
Variant	G : Gray collet nut

### Performance

Configuration	1P.M07 : 7 Low Voltage
Insulator	
Rated Current	5 Amps

### Specifications

Contact Type:	Solder
Max. Matings:	2000
Contact Dia.:	0.7 mm (0.0275in)
Bucket Dia.:	0.6 mm (0.024in)
Max. Solid Conductor:	0.14 mm <sup>2</sup> (AWG 26)
Max. Stranded Conductor:	0.14 mm <sup>2</sup> (AWG 26)
R (max):	6.5 mOhm
Test voltage (kV rms) Contact-contact:	1.05


Air clearance min. (mm) or Creepage distance min. (mm): 0.85

## Others

F ret (min): 50 N  
F ret (max): 150 N  
IP Rating: 50

# DRAWINGS

## Draws

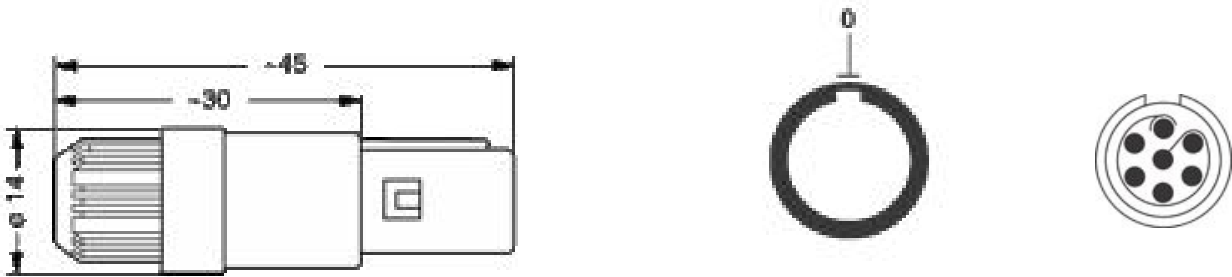

## Dimensions

	A	L
mm.	14	45
in.	0,55	1,77

# RECOMMENDED BY LEMO

## Tools

None

## Cables

CMN.07.T28.044PGCE	PVC	GREY	
CMN.07.T28.044PGZE		Grey	
CMN.07.T28.044PNCE	PVC	Black	
CMN.07.T28.044PNZE			
070 140	PVC	Grey	

Property of LEMO SA. All rights reserved  
This document is not contractual

